ST

FEATURES

- *RADY TO USE*
- *EASY TO INSTALL*
- *STURDY STRUCTURE*
- *COMPACT DEISGN*
- *AVAILABLE WITH DIFFERENT PUMPS*

The PIUSI ST is a versatile and compact diesel transfer station that can be used to fill mobile tanks or interact with distribution units. It is fitted with check valve, filter, nozzle and 4mt delivery hose. Its sturdy structure makes this dispenser suitable to be used in the harshest environments. It can be integrated with a protective metal box and water separating filter.

PERFORMANCE

UP TO 90 L/MIN	AC/DC VOLTAGE
FLOW-RATE	POWER
4MT LENGTH	
DELIVERY HOSE	

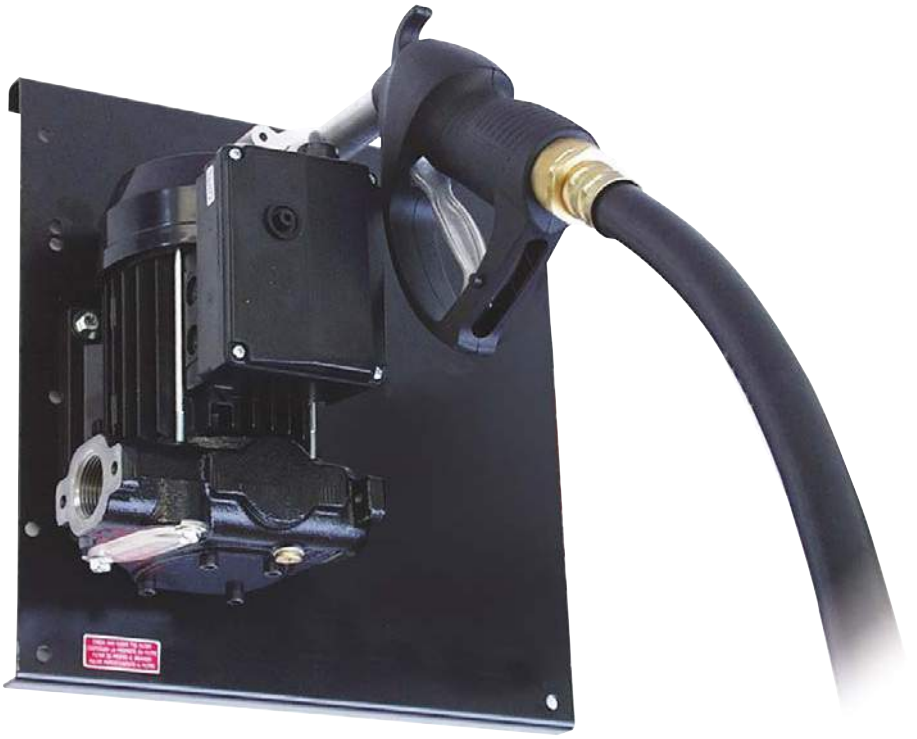

ST

PACKAGING

CODE	WEIGHT		PACKAGING		
	KG	LBS	MM	INCH	PCS/BOX
000266P00	16	35	357X357X275	14,1X14,1X10,8	1
000286P00	16	35	357X357X275	14,1X14,1X10,8	1
000266P20	21	46	357X357X275	14,1X14,1X10,8	1
00021400O	21	46	357X357X275	14,2X14,2X11,8	1
00021600O	23	50	480X370X265	18,9X14,6X10,4	1
00025200O	23	50	480X370X265	18,9X14,6X10,4	1
00024800O	20	44	357X357X275	14,1X14,1X10,8	1
F0021000B	10	22	357X357X275	14,1X14,1X10,8	1
F0021100B	10	22	357X357X275	14,1X14,1X10,8	1
F00340080	19	42	357X357X275	14,1X14,1X10,8	1

A AIR · A ANTIFREEZE · Ad AdBlue® · B BIODIESEL · D DIESEL · F FOOD · G GASOLINE · G GREASE · K KEROSENE · O OIL · W WATER · W WINDSCREEN

AVAILABLE WITH DIFFERENT PUMPS

AC PUMP - PANTHER

AC PUMP - E80

AC PUMP - E120

AC PUMP - VISCOMAT VANE

DC PUMP - BP3000

DC PUMP - PANTHER DC

IN THE BOX

- ST UNIT
- DELIVERY HOSE
- NOZZLE
- NOZZLE HOLDER
- INSTRUCTION MANUAL

DETAILS

MANUAL NOZZLE (pag. 122)

AUTOMATIC NOZZLE (pag. 118)

DIMENSIONS

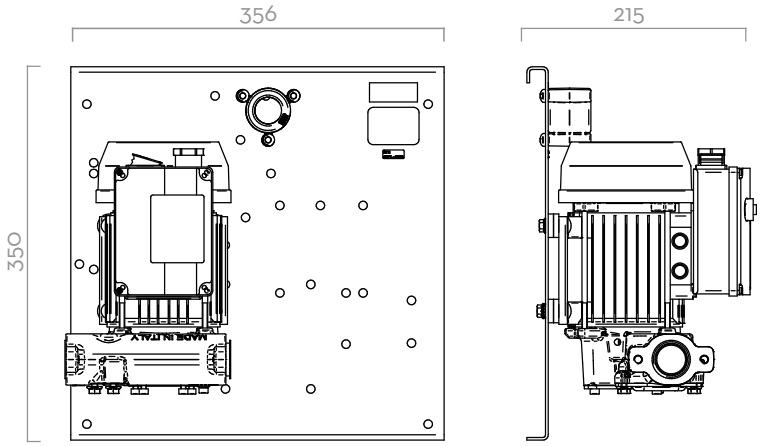

Dimensions expressed in millimeters

COMPONENTS

- PUMP:
  - PANTHER AC — PAG. 64
  - E80/E120 — PAG. 68
  - VISCOMAT VANE — PAG. 66
  - BP3000 — PAG. 74
  - PANTHER DC — PAG. 78
- NOZZLE:
  - MANUAL NOZZLE — PAG. 122
  - AUTOMATIC NOZZLE — PAG. 118

TECHNICAL DATA

CODE	DESCRIPTION	FLUIDS TYPE	FLOW-RATE		VOLTAGE			METER	NOZZLE	FILTER	DELIVERY HOSE		INLET
			L/MIN	GPM	AC V./HZ DC VOLT	POWER WATT	AMP. MAX.	TYPE	TYPE	TYPE	LENGTH	Ø	bsp
000266P00	ST PANTHER 56	D	56	15	230/50	350	3	NO	MAN.	NO	4M	3/4"	1"
000286P00	ST PANTHER 56 A60	D	56	15	230/50	350	3	NO	AUT.	NO	4M	3/4"	1"
000266P20	ST PANTHER 72/M	D	72	19	230/50	500	4,2	NO	MAN.	NO	4M	3/4"	1"
000214000	ST E 80	D	80	21	230/50	700	3,5	NO	MAN.	NO	4M	1"	1"
000216000	ST E 120	D	90	24	230/50	1150	5,7	NO	MAN.	NO	4M	1"	1"
000252000	ST E 120 A120	D	90	24	230/50	1150	5,7	NO	AUT.	NO	4M	1"	1"
000248000	ST VISCOMAT 70 (RAPSOIL)	B	30	8	230/50	950	4,6	NO	MAN.	NO	4M	1"	1"
F0021000B	ST BYPASS 3000 12V	D	42	11	12	260	22	NO	MAN.	NO	4M	3/4"	1"
F0021100B	ST BYPASS 3000 24V	D	42	11	24	300	12	NO	MAN.	NO	4M	3/4"	1"
F0034008O	ST PANTHER DC 12V	D	56	15	12	420	35	NO	MAN.	NO	4M	3/4"	1"

THE UNIT CAN ALSO BE SUPPLIED FOR OPERATING UNDER DIFFERENT VOLTAGES AND WITHOUT METER.